


### Principal characteristics

- The transducer's compactness makes it suitable for installation in small spaces and for detecting small shifts.
- The joint with up-take of slack and M4 threading provides greater tolerances in movement.
- Installation is simplified by the lack of electrical signal variation at output outside theoretical electrical stroke.
- Ideal for small mechanical devices, valves, and test tools and benches.

### TECHNICAL DATA

|  |   |
|--|---|
| Useful electrical stroke (C.E.U.)                    | 25/50/75/100/125/150  |
| Resolution   | Infinite  |
| Independent linearity (within C.E.U.)                | see table   |
| Displacement speed                                   | ≤ 5 m/s   |
| Displacement force                                   | ≤ 1.2 N   |
| Life   | >25x10 <sup>6</sup> strokes, or 100x10 <sup>6</sup> operations, whichever is less (within C.E.U.) |
| Vibrations   | 5...2000Hz, Amax = 0,75 mm amax. = 20 g   |
| Shock  | 50 g, 11ms.   |
| Tolerance on resistance                              | ± 20%   |
| Recommended cursor current                           | < 0,1 mA  |
| Maximum cursor current                               | 10mA  |
| Maximum applicable voltage                           | see table   |
| Electrical isolation                                 | >100MΩ a 500V~, 1bar, 2s  |
| Dielectric strength                                  | < 100 mA a 500V~, 50Hz, 2s, 1bar  |
| Dissipation at 40°C (0W at 120°C)                    | see table   |
| Actual Temperature Coefficient of the output voltage | < 1,5ppm/°C   |
| Working temperature                                  | -30...+100°C  |
| Storage temperature                                  | -50...+120°C  |
| Case material  | Anodised aluminium Nylon 66 G 25  |
| Control rod material                                 | Stainless steel AISI 303  |
| Fixing   | Brackets with variable longitudinal axe   |

### MECHANICAL DIMENSIONS

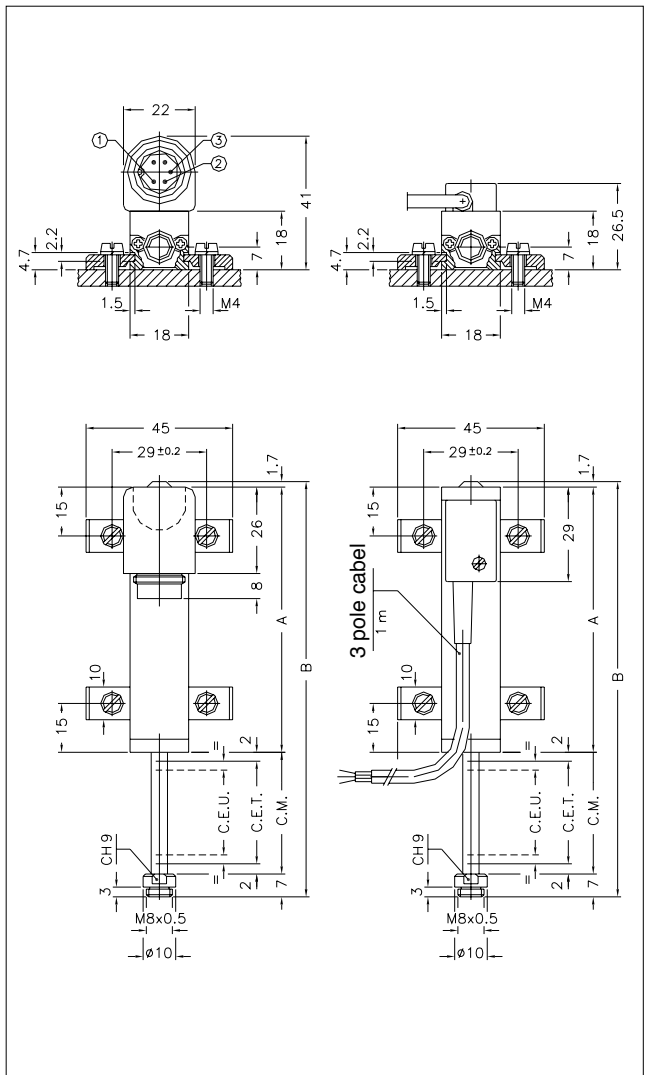


**Important:** all the data reported in the catalogue linearity, lifetime, temperature coefficient are valid for a sensor utilization as a ratiometric device with a max current across the cursor  $I_c \leq 0.1 \mu A$ .

## MECHANICAL / ELECTRICAL DATA

| Model                                      |     | 25           | 50    | 75    | 100   | 125   | 150   |
|--|-----|--------------|-------|-------|-------|-------|-------|
| Useful electrical stroke (C.E.U.) +1 / -0  | mm  | 25           | 50    | 75    | 100   | 125   | 150   |
| Theoretical electrical stroke (C.E.T.) ± 1 | mm  | C.E.U. +1    |       |       |       |       |       |
| Resistance (on C.E.T.)                     | kΩ  | 1            | 5     | 5     | 5     | 5     | 5     |
| Independent linearity (within C.E.U.)      | ± % | 0.2          | 0.1   | 0.1   | 0.1   | 0.05  | 0.05  |
| Dissipation at 40°C (0W at 120°C)          | W   | 0.6          | 1.2   | 1.8   | 2.5   | 3     | 3.6   |
| Maximum applicable voltage                 | V   | 25           | 60    |       |       |       |       |
| Mechanical stroke (C.M.)                   | mm  | C.E.U. +5    |       |       |       |       |       |
| Case length (A)                            | mm  | C.E.U. +49.5 |       |       |       |       |       |
| Total length (B)                           | mm  | 113.2        | 163.2 | 213.2 | 263.2 | 313.2 | 363.2 |


## ELECTRICAL CONNECTIONS

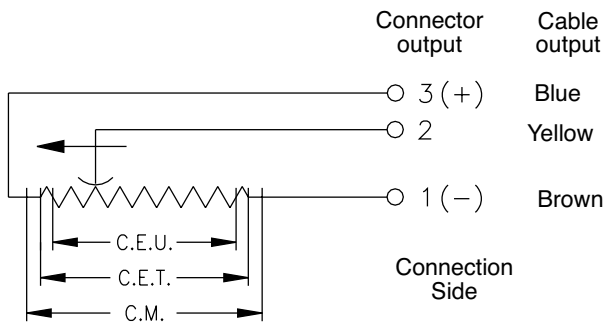


### INSTALLATION INSTRUCTIONS

- Respect the indicated electrical connections (DO NOT use the transducer as a variable resistance)
- When calibrating the transducer, be careful to set the stroke so that the output does not drop below 1% or rise beyond 99% of the supply voltage.

## COUPLING JOINT

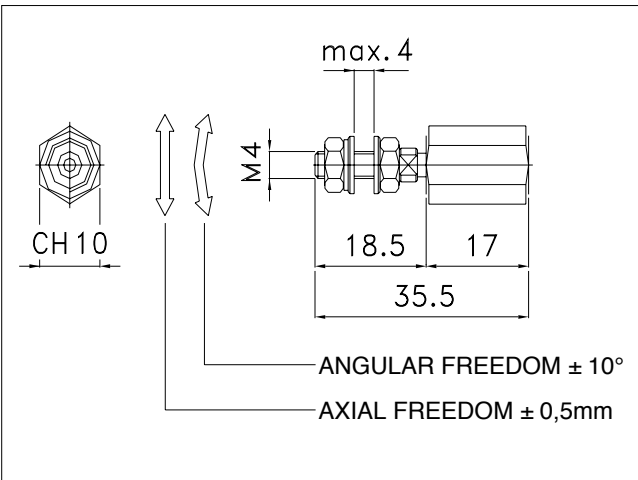

## OPTIONAL FIXING KIT PKIT006

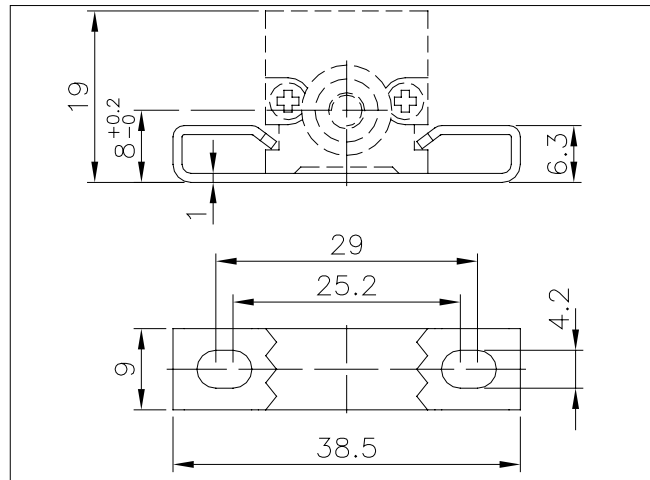

## ORDER CODE

Displacement transducer **PA1**

|                                    |          |
|------------------------------------|----------|
| 3 pole PVC cable output 3x0.25 1m. | <b>F</b> |
| 5 pole connector output DIN 43322  | <b>C</b> |

Model

**S** **M**

Cable length (in meters)

This part of the code only applies to the model with cable output

|                                      |          |
|--------------------------------------|----------|
| No certificate attached              | <b>0</b> |
| Linearity curve to be attached       | <b>L</b> |
| Standard mounting brackets (PKIT005) | <b>X</b> |
| Optional mounting brackets (PKIT006) | <b>S</b> |
| Color of plastic heads (green)       | <b>0</b> |
| Color of plastic heads (black)       | <b>N</b> |

Ex.: **PA1 - C - 100**

Displacement transducer model PA1, 5 pole connector output, useful electrical stroke (C.E.U.) 100mm

## ACCESSORIES

### STANDARD ACCESSORIES

|   |                |
|---|----------------|
| Fixing kit: 4 brackets, M4x10 screws, grower                          | <b>PKIT005</b> |
| Fixing kit: 2 "wraparound" brackets (0000X000S00 configurator option) | <b>PKIT006</b> |
| Coupling joint  | <b>PKIT020</b> |

### OPTIONAL ACCESSORIES

|   |               |
|---|---------------|
| 5-pin axial female PCB connector DIN43322 IP40 clamp for wire $\varnothing 4 - \varnothing 6$ mm      | <b>CON011</b> |
| 5-pin axial female PCB connector DIN43322 IP65 clamp PG7 for wire $\varnothing 4 - \varnothing 6$ mm  | <b>CON012</b> |
| 5-pin 90° radial female PCB connector DIN43322 IP40 clamp for wire $\varnothing 4 - \varnothing 6$ mm | <b>CON013</b> |

**GEFRAN spa** reserves the right to make any kind of design or functional modification at any moment without prior notice